

FLIR A6200sc

SWIR performance camera with InGaAs detector



HIGH QUALITY SWIR IMAGES

The FLIR A6200sc is equipped with an Indium Gallium Arsenide (InGaAs) detector that makes phenomena in the 0.9 to 1.7 μm waveband visible. The camera produces crisp thermal images of 640 \times 512 pixels. It provides great image detail and small spot size for target detection and accurate measurements.

ADJUSTABLE FRAME RATES AND TRIGGERING

Frame rate output can be adjusted from 0.015Hz to the maximum frame rate at a given window size and integration time with better than 0.1Hz resolution. Sub window modes allow the user to select a subset of the total image to be read out, resulting in faster frame rates. The smart external triggering features allows synchronization of the image capture to the most fleeting of events.

STANDARD VIDEO INTERFACE

The FLIR A6200sc is a true "plug and play" thermal imaging camera with standard GigE Vision or USB3 Vision digital video. GenICam is used for camera control. With GenICam, no proprietary SDK is required with the A6200sc. The camera also supports an analog video output via BNC. The simultaneous and independent video streams provide display and recording flexibility.

TEMPERATURE CALIBRATION AND MEASUREMENT

The 0.9 to 1.7 μm sensing waveband of the A6200sc corresponds to the ability to measure black body temperatures above 200 $^{\circ}\text{C}$. Couple this with the ability to see through materials like glass, the A6200sc becomes a perfect tool for high temperature thermal measurement into an oven or furnace.

SOFTWARE

The FLIR A6200sc camera works seamlessly together with FLIR ResearchIR Max software enabling intuitive viewing, recording and advanced processing of the thermal data provided by the camera.

MATLAB COMPATIBILITY

Control the A6200sc and capture data directly into MathWorks[®] MATLAB software for advanced image analysis and processing.

KEY FEATURES

- INGAAS DETECTOR OPERATING IN THE 0.9 TO 1.7 μm WAVEBAND
- EXCELLENT IMAGE QUALITY: 640 X 512 PIXELS
- HIGH SENSITIVITY
- SYNCHRONIZATION: WITH OTHER INSTRUMENTS
- CONTROL OVER GENICAM OR MATLAB



See through paints to visualize hidden details




Imaging through layers of silicon for wafer analysis



Imaging Specifications

Frame Sync	FLIR A6200sc
Detector Type	Indium Gallium Arsenide (InGaAs)
Spectral Range	0.9 – 1.7 μm or 0.4 – 1.7 μm
Resolution	640 x 512
Detector Pitch	25 μm
Noise (NEI)	1.5E-9 W/cm ² (Low Gain) 5.0E-10 W/cm ² (High Gain)
Quantum Efficiency	>80% from 1 to 1.6 μm
Well Capacity	Low Gain: 2.5 M electrons High Gain: 0.075 M electrons
Operability	99.5% (99.8% typical)
Sensor Cooling	TEC (0 – 20°C)
Electronics / Imaging	
Readout	Snapshot
Readout Modes	Asynchronous Integrate While Read; Asynchronous Integrate Then Read
Synchronization Modes	Frame Sync
Integration Time	2 μs to 687 seconds
Subwindow Modes	Full, 1/2, or 1/4 Window
Max Frame Rate	60 Hz @ Full Window 240 Hz @ 1/2 Window 480 Hz @ 1/4 Window
Dynamic Range	14-bit
Digital Data Protocol	(GigE Vision 2.0) USB3 USB3 Vision
Analog Video	NTSC, PAL
Command & Control	GenICam
Measurement	
Optional Temperature Calibration	Call for Details
Optics	
Camera f/#	Lens Dependant
Available Lenses	25 mm, 50 mm, 75 mm, 100 mm, 200 mm
Focus	Manual
Filtering	Behind the Lens
Analog Video	
Analog Palettes	Selectable 8-bit
AGC	Manual, Linear, Plateau Equalization, DDE
Zoom	Video Zoom is Auto Selected: 1x for Full and 1/2 window, 2x for 1/4 window
General	
Operating Temperature Range	-40°C to +50°C (-40°F to 122°F)
Storage Temperature Range	-55°C to 80°C (-67°F to 176°F)
Altitude	0 to 10,000 Feet Operational; 0 to 70,000 Feet Non-Operational
Shock / Vibration	40 g, 11 msec 1/2 sine pulse / 4.3 g RMS Random Vibration, All 3 Axis
Power	24 VDC (<50 W steady state)
Weight w/o Lens	5 lbs
Size (L x W x H) w/o Lens	8.5 x 4.0 x 4.3" / 21.6 x 10.2 x 10.9cm
Mounting	2 x 1/4" -20, 1 x 3/8" -16, 4 x 10/24

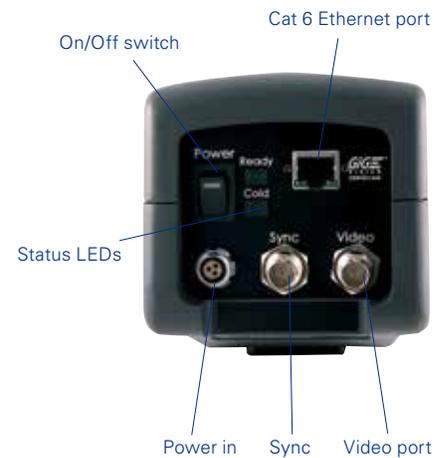

PORTLAND
Corporate Headquarters
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA
PH: +1 866.477.3687

BELGIUM
FLIR Systems Trading
Belgium BVBA
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 (0) 3665 5100

SWEDEN
FLIR Systems AB
Antennvägen 6,
PO Box 7376
SE-187 66 Täby
Sweden
PH: +46 (0)8 753 25 00

www.flir.com
NASDAQ: FLIR

Specifications are subject to change without notice
©Copyright 2014, FLIR Systems, Inc. All other brand and product names
are trademarks of their respective owners. The images displayed may not
be representative of the actual resolution of the camera shown. Images for
illustrative purposes only. (Created 08/14)

NASHUA
FLIR Systems, Inc.
9 Townsend West
Nashua, NH 06063
USA
PH: +1 603.324.7611

UK
FLIR Systems UK
2 Kings Hill Avenue
Kings Hill
West Malling - Kent
ME19 4AQ
United Kingdom
PH: +44 (0)1732 220 011